

# 東莞永力電業有限公司

YUNG LI CO., LTD

No.32,Dapu Industrial St.,GangZi,Chang Ping Town,  
DongGuan City,GuangDong Province,China 523571

TEL:0769-83396797~8

FAX:0769-83396796

E-mail: sales@yung-li.com

Description: YP-12/YC-12

Customer: MAG




Parts No. : CB-N-US-3M

Draw No. :

## REVISION RECORD

|   |  |  |
|---|--|--|
| 1 |  |  |
| 2 |  |  |
| 3 |  |  |
| 4 |  |  |
| 5 |  |  |




| YUNG LI |             | CUSTOMER | APPROVED |
|---------|-------------|----------|----------|
| CHECKED | PREPARED BY |          |          |
|         |             |          |          |

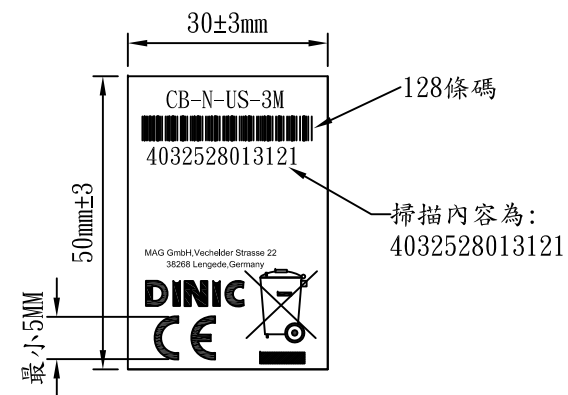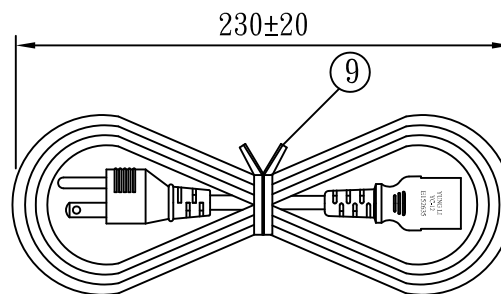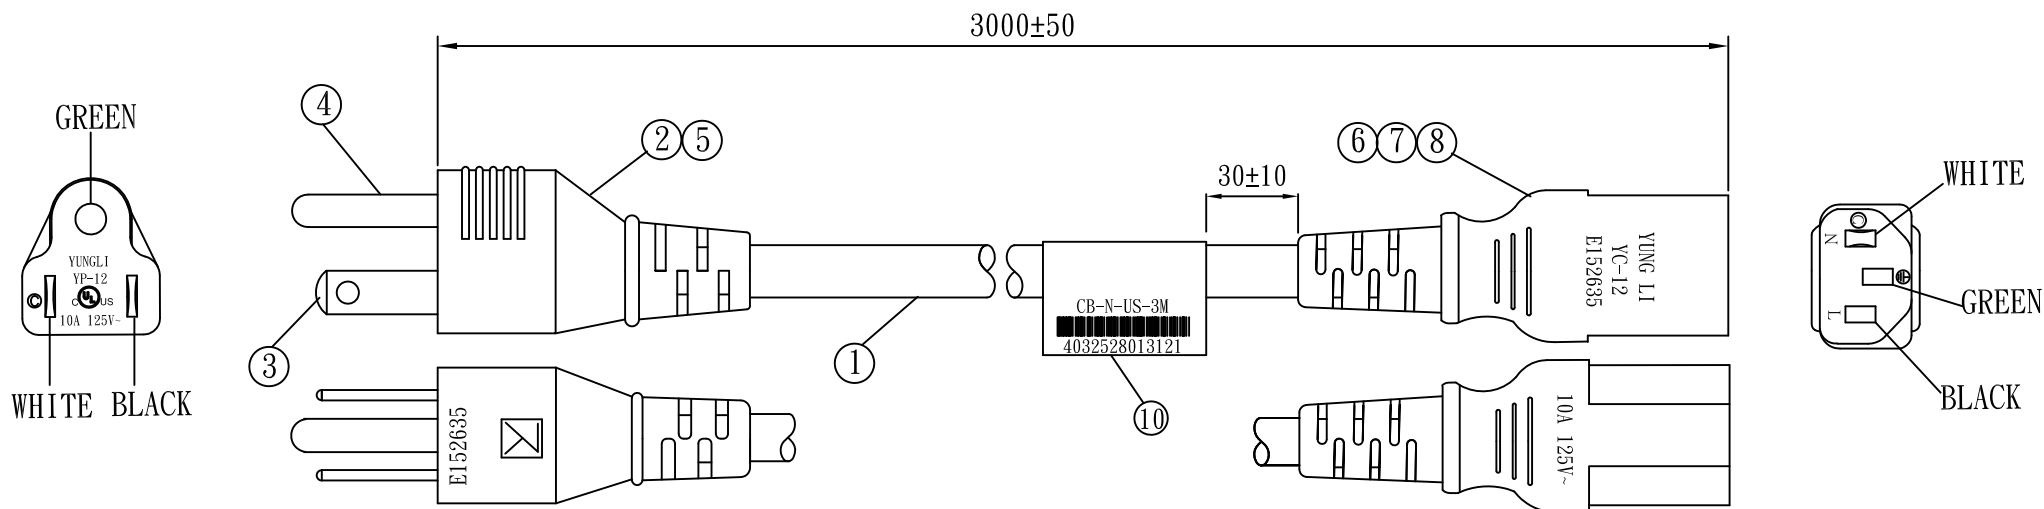

| NO. | SPECIFICATION               | QTY    | REMARK |
|-----|-----------------------------|--------|--------|
| 1   | SJT 18/3C 105°C BLACK       | 1PC    |        |
| 2   | YP-12 PVC PLASTIC 35P BLACK | 19g/PC |        |
| 3   | TERMINAL:98675BS-1          | 2PCS   |        |
| 4   | Ø4.75 TERMINAL:98475        | 1PC    |        |
| 5   | YP-12 INNER BODY            | 1PC    |        |
| 6   | YC-12 PVC PLASTIC 50P BLACK | 18g/PC |        |
| 7   | U-TYPE TERMINAL:97740       | 3PCS   |        |
| 8   | YC-12 INNER BODY            | 1PC    |        |
| 9   | MINI TIE:L=150mm BLACK      | 1PC    |        |
| 10  | LABEL:50*30mm 128 CORD      | 1PC    |        |





|                                                                              |             |             |      |          |                                                                                       |                                                                                       |      |    |
|------------------------------------------------------------------------------|-------------|-------------|------|----------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|------|----|
| TOLERANCE<br>>0±0.30<br>>1.0±0.50<br>>10.0±1.0<br>>20.0±2.0<br>Angle:<br>±1° | APPROVED    |             | DATE |          | YUNG LI CO., LTD                                                                      |                                                                                       |      |    |
|                                                                              | CHECKED     |             | DATE |          |                                                                                       |                                                                                       |      |    |
|                                                                              | DRAWN       | SUKI        | DATE | 22.08.31 | CUSTOMER                                                                              | MAG                                                                                   |      |    |
|                                                                              | TYPE        | YP-12/YC-12 |      |          | P/N                                                                                   | CB-N-US-3M                                                                            |      |    |
|                                                                              | DRAWING NO. | CY-U1334    |      |          | MATERIAL                                                                              | P. V. C                                                                               | UNIT | mm |
| SCALE                                                                        |             |             |      |          |  |  |      |    |

NEMA 5-15P

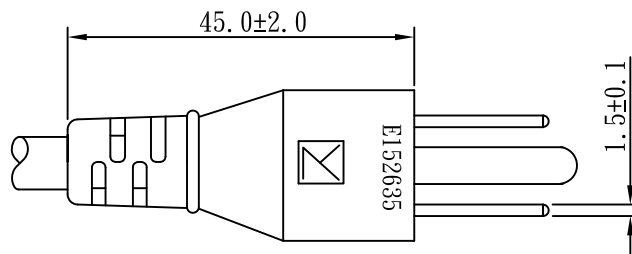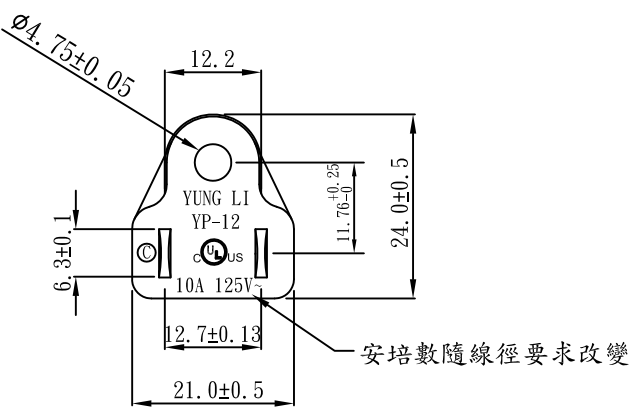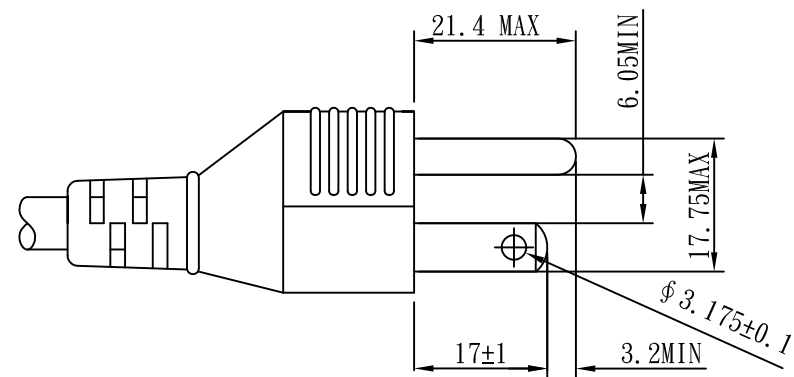

| 線號    | 安培數列表     |           |
|-------|-----------|-----------|
| 18AWG | 7A 125V~  | 10A 125V~ |
| 16AWG | 13A 125V~ |           |
| 14AWG | 15A 125V~ |           |
| 12AWG | 15A 125V~ |           |

|                                                                              |             |       |      |          |                  |     |                                                                                       |                                                                                       |
|------------------------------------------------------------------------------|-------------|-------|------|----------|------------------|-----|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| TOLERANCE<br>>0±0.30<br>>1.0±0.50<br>>10.0±1.0<br>>20.0±2.0<br>Angle:<br>±1° | APPROVED    |       | DATE |          | YUNG LI CO., LTD |     |                                                                                       |                                                                                       |
|                                                                              | CHECKED     |       | DATE |          |                  |     |                                                                                       |                                                                                       |
|                                                                              | DRAWN       | 周淑萍   | DATE | 24.04.19 |                  |     |                                                                                       |                                                                                       |
|                                                                              | TYPE        | YP-12 |      |          | P/N              |     |                                                                                       |                                                                                       |
|                                                                              |             |       |      |          | MATERIAL         | PVC | UNIT                                                                                  | mm                                                                                    |
|                                                                              | DRAWING NO. |       |      |          | SCALE            | 1:1 |  |  |

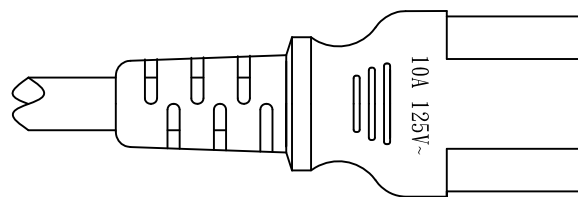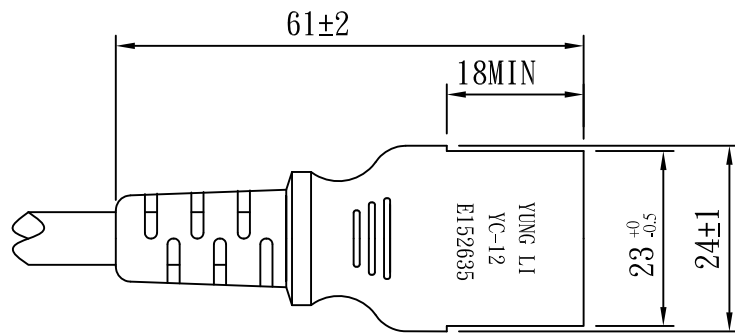

| AWG | List of amp.          |           |
|-----|-----------------------|-----------|
| 12# | 15A 125V~             | 15A 250V~ |
| 14# | 15A 125V~             | 15A 250V~ |
| 16# | 13A 125V~             | 13A 250V~ |
| 18# | 7A 125V~<br>10A 125V~ | 10A 250V~ |

|                                                                              |             |       |      |          |                  |     |      |    |
|------------------------------------------------------------------------------|-------------|-------|------|----------|------------------|-----|------|----|
| TOLERANCE<br>>0±0.30<br>>1.0±0.50<br>>10.0±1.0<br>>20.0±2.0<br>Angle:<br>±1° | APPROVED    |       | DATE |          | YUNG LI CO., LTD |     |      |    |
|                                                                              | CHECKED     |       | DATE |          |                  |     |      |    |
|                                                                              | DRAWN       | Melon | DATE | 23.03.22 |                  |     |      |    |
|                                                                              | TYPE        | YC-12 |      |          | P/N              |     |      |    |
|                                                                              | DRAWING NO. |       | REV  | B        | SCALE            | 1:1 | UNIT | mm |

# YUNG LI CO., LTD

## SPECIFICATION

|            |       |                         |             |
|------------|-------|-------------------------|-------------|
| Yung-Li    | Style | PVC FLEXIBLE CORDS      | Document No |
| 2022.05.25 |       |                         |             |
| Edition    | Size  | <b>SJT 18/ 3C 105°C</b> | Page        |
| A          |       |                         | 1/2         |

1. Standard : UL 62 UL 1581

### 2. Construction & Dimension

| Item          |                                | Specification               |
|---------------|--------------------------------|-----------------------------|
| Conductor     | Size                           | 18AWG X 3C                  |
|               | Material                       | Annealed Bare Copper        |
|               | Construction                   | 41/ $\phi$ 0.16 $\pm$ 0.005 |
| Insulation    | Material                       | PVC                         |
|               | Minimum Average Thickness      | 0.76mm                      |
|               | Minimum Thickness at any point | 0.69mm                      |
|               | Diameter                       | 2.75 $\pm$ 0.10             |
|               | Identification                 | Black White Green           |
| Core Assembly | Core Twist                     | 3-Core                      |
|               | Filler                         | NA                          |
|               | Assembly Pair                  | NA                          |
| Taping        | Mylar Foil                     | NA                          |
| Shielded      | A1-Mylar Foil                  | NA                          |
| Drain Wire    | Material                       | NA                          |
|               | Construction                   | NA                          |
| Jacket        | Material                       | PVC                         |
|               | Minimum Average Thickness      | 0.76mm                      |
|               | Minimum Thickness at any point | 0.61mm                      |
|               | Overall Diameter(Approx)       | 7.8 $\pm$ 0.2               |
|               | Color                          | Any Color                   |

Marking :

**YUNG LI. c(UL)us E241374 SJT 3/C 18AWG(0.824mm<sup>2</sup>) 105°C 300V VW-1**

# YUNG LI CO., LTD


## SPECIFICATION

|            |       |                        |             |
|------------|-------|------------------------|-------------|
| Yung-Li    | Style | PVC FLEXIBLE CORDS     | Document No |
| 2022.05.25 |       |                        |             |
| Edition    | Size  | <b>SJT 18/ 3C 105℃</b> | Page        |
| A          |       |                        | 2/2         |

### 3.Electrical & Physical Properties

| Item                  |        |                  | Specification                   |
|-----------------------|--------|------------------|---------------------------------|
| Rating Voltage        |        |                  | 300V                            |
| Insulation Resistance |        |                  | $\geq 0.76M\Omega/Km$ 15.0℃ Min |
| Dielectric Strength   |        |                  | AC 2.0KV/1 min No Crack         |
| Spark Test            |        |                  | 6KV/0.15 Sec                    |
| Insulation            | Unaged | Tensile Strength | 1500 lbs/in <sup>2</sup> min    |
|                       |        | Elongation       | 100%Min                         |
|                       | Aged   | Tensile Strength | Min 85%(136±1℃ x168hrs)         |
|                       |        | Elongation       | Min 65%(136±1℃ x168hrs)         |
| Jacket                | Unaged | Tensile Strength | 1500 lbs/in <sup>2</sup> min    |
|                       |        | Elongation       | 100%Min                         |
|                       | Aged   | Tensile Strength | Min 85%(136±1℃ x168hrs)         |
|                       |        | Elongation       | Min 45%(136±1℃ x168hrs)         |
| Deformation Test      |        |                  | 121±1℃ m X 1hr $\leq$ 50%       |
| Cold Bend Test        |        |                  | -20℃ x 4hr No Crack             |
| Heat Shock Test       |        |                  | 121±1℃ x 1hr No Crack           |
|                       |        |                  |                                 |

Graph:

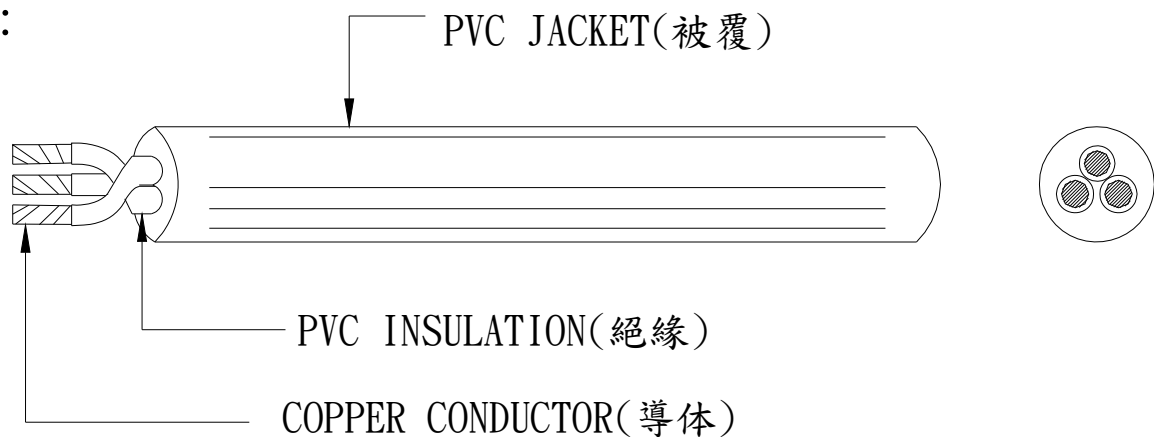

Note: In the process of enhancing our systems, we are transitioning data to a new PiQ data view. This data is being verified with the "Historical" view for accuracy. Once the data is confirmed, the "Historical" view will be discontinued. During this transition, you may encounter duplicate entries or missing/outdated data. For queries during this interim period, please visit our [Historical View FAQs](#) or contact our [Customer Service](#).

## Cord Sets and Power-supply Cords Certified for Canada

[See General Information for Cord Sets and Power-supply Cords Certified for Canada](#)

### YUNG LI CO LTD

7F-12 NO 99 SEC 1 XINTAI 5TH RD

XIZHI DISTRICT

NEW TAIPEI, 22175 TAIWAN

### Power-supply cords

E152635

| Cat. No. | ANSI/NEMA<br>WD6 Config | Cord<br>AWG | Cord<br>Type                                                                                                                                                                                                                             | Electrical<br>Rating<br>Amps V |
|----------|-------------------------|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|
| YP-11    | 1-15                    | 18/2        | SPT-1, SPT-2, SPT-3, NISPT-2, SVT, SVTO, SJT, SJTW, SJTO, SJTOW (All TPE material), SPT-1, SPT-1W, NISPT-1, SPT-2, SPT-2W, NISPT-2, SPT-3, HPN, SVT, SVTO, SJT, SJTW, SJTO, SJTOW, SV, SVO, SJ, SJO, SJOW, SJOOW, EVT, EVJT, EVE, EVJE   | 7 or 10/125                    |
|          |                         | 17/2        | SVT, SVTO (All TPE material), SVT, SVTO, SV, SVO, SJ, SJO, SJOW, SJOOW, EVT, EVJT, EVE, EVJE                                                                                                                                             | 12/125                         |
|          |                         | 16/2        | SPT-2, SPT-3, NISPT-2, SVT, SVTO, SJT, SJTW, SJTO, SJTOW (All TPE material), SPT-2, SPT-2W, NISPT-2, SPT-3, SVT, SVTO, SJT, SJTW, SJTO, SJTOW, SV, SVO, SJ, SJO, SJOW, SJOOW, EVT, EVJT, EVE, EVJE                                       | 13/125                         |
|          |                         | 16/2        | HPN                                                                                                                                                                                                                                      | 15/125                         |
|          |                         | 14/2        | SPT-3, SJT, SJTW, SJTO, SJTOW (All TPE material), SPT-3, SJT, SJTW, SJTO, SJTOW, SJ, SJO, SJOW, SJOOW, EVT, EVJT, EVE, EVJE                                                                                                              | 15/125                         |
| YP-11W   | 1-15P                   | 18/2        | SPT-1, SPT-2, SPT-3, NISPT-2, SVT, SVTO, SJT, SJTW, SJTO, SJTOW (All TPE material), SPT-1, SPT-1W, NISPT-1, SPT-2, SPT-2W, NISPT-2, SPT-3, HPN, SVT, SVTO, SJT, SJTW, , SJTO, SJTOW, SV, SVO, SJ, SJO, SJOW, SJOOW, EVT, EVJT, EVE, EVJE | 7 or 10/125                    |
|          |                         | 17/2        | SVT, SVTO (All TPE material), SVT, SVTO, SV, SVO, SJ, SJO, SJOW, SJOOW, EVT, EVJT, EVE, EVJE                                                                                                                                             | 12/125                         |
|          |                         | 16/2        | SPT-2, SPT-3, NISPT-2, SVT, SVTO, SJT, SJTW, SJTO, SJTOW (All TPE material), SPT-2, SPT-2W, NISPT-2, SPT-3, SVT, SVTO, SJT, SJTW, SJTO, SJTOW, SV, SVO, SJ, SJO, SJOW, SJOOW, EVT, EVJT, EVE, EVJE                                       | 13/125                         |
|          |                         | 16/2        | HPN                                                                                                                                                                                                                                      | 15/125                         |

|        |      |      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |             |
|--------|------|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|
|        |      | 14/2 | SPT-3, SJT, SJTW, SJTO, SJTOW (All TPE material), SPT-3, SJT, SJTW, SJTO, SJTOW, SJ, SJO, SJOW, SJOOW, EVT, EVJT, EVE, EVJE                                                                                                                                                                                                                                                                                                                                                                                                                | 15/125      |
| YP-11C | 1-15 | 18/2 | NISPT-2 (TPE), NISPT-1, NISPT-2, EVT, EVJT, EVE, EVJE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 7 or 10/125 |
| YP-12  | 5-15 | 18/3 | SVT, SJT, SJTW, SJTO, SJTOW, ST, STW, STOW (Shielded and Non-shielded for all types), SVTO, SPT-2, SPT-3 (All TPE material), SVT, SVT Shielded, SVTO, SJT, SJT Shielded, SJTW, SJTW Shielded, SJTO, SJTO Shielded, SJTOW, SJTOW Shielded, SJTOOW, ST, ST Shielded, STW, STW Shielded, STOW, STOW Shielded, SV, SVO, SJ, SJ Shielded, SJO, SJO Shielded, SJOO, SJOO Shielded, SJOW, SJOW Shielded, SJOOW, SJOOW Shielded, S, SO, SO Shielded, SOO, SOO Shielded, SOW, SOW Shielded, SOOW, SOOW Shielded, SPT-2, SPT-3, EVT, EVJT, EVE, EVJE | 7 or 10/125 |
|        |      | 17/3 | SVT, SVTO (All TPE material), SVT, SVTO, SV, SVO, EVT, EVJT, EVE, EVJE                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 12/125      |
|        |      | 16/3 | SVT, SJT, SJTW, SJTO, SJTOW, ST, STW, STOW (Shielded and Non-shielded for all types), SVTO, SPT-2, SPT-3 (All TPE material), SVT, SVT Shielded, SVTO, SJT, SJT Shielded, SJTW, SJTW Shielded, SJTO, SJTO Shielded, SJTOW, SJTOW Shielded, SJTOOW, ST, ST Shielded, STW, STW Shielded, STOW, STOW Shielded, SV, SVO, SJ, SJ Shielded, SJO, SJO Shielded, SJOO, SJOO Shielded, SJOW, SJOW Shielded, SJOOW, SJOOW Shielded, S, SO, SO Shielded, SOO, SOO Shielded, SOW, SOW Shielded, SOOW, SOOW Shielded, SPT-2, SPT-3, EVT, EVJT, EVE, EVJE | 13/125      |
|        |      | 14/3 | SJT, SJTW, SJTO, SJTOW, ST, STW, STOW (Shielded and Non-shielded for all types), SPT-3 (All TPE material), SJT, SJT Shielded, SJTW, SJTW Shielded, SJTO, SJTO Shielded, SJTOW, SJTOW Shielded, SJTOOW, ST, ST Shielded, STW, STW Shielded, STOW, STOW Shielded, SJ, SJ Shielded, SJO, SJO Shielded, SJOO, SJOO Shielded, SJOW, SJOW Shielded, SJOOW, SJOOW Shielded, S, SO, SO Shielded, SOO, SOO Shielded, SOW, SOW Shielded, SOOW, SOOW Shielded, SPT-3, EVT, EVJT, EVE, EVJE, SJT-B                                                     | 15/125      |
|        |      | 12/3 | SJT, SJTW, SJTO, SJTOW, ST, STW, STOW (Shielded and Non-shielded for all types), SPT-3 (All TPE material), SJT, SJT Shielded, SJTW, SJTW Shielded, SJTO, SJTO Shielded, SJTOW, SJTOW Shielded, SJTOOW, ST, ST Shielded, STW, STW Shielded, STOW, STOW Shielded, SJ, SJ Shielded, SJO, SJO Shielded, SJOO, SJOO Shielded, SJOW, SJOW Shielded, SJOOW, SJOOW Shielded, S, SO, SO Shielded, SOO, SOO Shielded, SOW, SOW Shielded, SOOW, SOOW Shielded, SPT-3, EVT, EVJT, EVE, EVJE                                                            | 15/125      |
| YP-12L | 5-15 | 18/3 | SVT, SVT shielded, SJT, SJTW, SJTO, SJTOW, ST, STW, STOW, SPT-2, SPT-3 (All TPE material), SVT, SVT shielded, SJT, SJTW, SJTO, SJTOW, ST, STW, STOW, SO, SOW, SOOW, SPT-2, SPT-3, EVT, EVJT, EVE, EVJE                                                                                                                                                                                                                                                                                                                                     | 7 or 10/125 |

|                  |        |      |                                                                                                                                     |            |
|------------------|--------|------|-------------------------------------------------------------------------------------------------------------------------------------|------------|
| YP-109           | L7-30P | 14/3 | SJ, SJO, SJOW, SJO, SJOOW, S, SO, SOW, SOO, SOOW, SJT, SJTW, SJTO, SJTOW, SJTOO, SJTOOW, ST, STW, STO, STOW, STOO, STOOW            | 18/277 Vac |
|                  |        | 12/3 | SJ, SJO, SJOW, SJO, SJOOW, S, SO, SOW, SOO, SOOW, SJT, SJTW, SJTO, SJTOW, SJTOO, SJTOOW, ST, STW, STO, STOW, STOO, STOOW            | 25/277 Vac |
|                  |        | 10/3 | SJ, SJO, SJOW, SJO, SJOOW, S, SO, SOW, SOO, SOOW, SJT, SJTW, SJTO, SJTOW, SJTOO, SJTOOW, ST, STW, STO, STOW, STOO, STOOW            | 30/277 Vac |
|                  |        | 8/3  | S, SO, SOW, SOO, SOOW, ST, STW, STO, STOW, STOO, STOOW                                                                              | 30/277 Vac |
| YP-12R, YP-12R-1 | 5-15P  | 18/3 | SJ, SJO, SJOW, SJO, SJOOW, S, SO, SOW, SOO, SOOW, SVT, SVTO, SJT, SJTW, SJTO, SJTOW, SJTOO, SJTOOW, ST, STW, STO, STOW, STOO, STOOW | 10/125     |
|                  |        | 16/3 | SJ, SJO, SJOW, SJO, SJOOW, S, SO, SOW, SOO, SOOW, SJT, SJTW, SJTO, SJTOW, SJTOO, SJTOOW, ST, STW, STO, STOW, STOO, STOOW            | 13/125     |
|                  |        | 14/3 | SJ, SJO, SJOW, SJO, SJOOW, S, SO, SOW, SOO, SOOW, SJT, SJTW, SJTO, SJTOW, SJTOO, SJTOOW, ST, STW, STO, STOW, STOO, STOOW            | 15/125     |
|                  |        | 12/3 | SJ, SJO, SJOW, SJO, SJOOW, SJT, SJTW, SJTO, SJTOW, SJTOO, SJTOOW                                                                    | 15/125     |

#### Special-use cord sets

| Cat. No.                                    | IEC<br>320<br>Config | Cord<br>AWG | Cord<br>Type                                                                                                                                                                                                                                                              | Electrical<br>Rating<br>Amps V |
|---------------------------------------------|----------------------|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|
| YC-11                                       | IEC<br>C17           | 18          | SPT-1, SPT-2, SPT-3, NISPT-2, SVT, SJT, SJTO, SJTOW, ST, STW, STOW (All TPE material), SPT-1, SPT-2, NISPT-1, NISPT-2, SPT-3, SVT, SJT, SJTO, SJTW, SJTOW, ST, STW, STOW, SO, SOW, SOOW                                                                                   | 2.5, 7 or<br>10/125 or<br>250  |
|                                             |                      | 17          | SPT-3, SVT, SJT, SJTW, SJTO, SJTOW, ST, STW, STOW (All TPE material), SPT-3, SVT, SJT, SJTW, SJTO, SJTOW, ST, STW, STOW, SO, SOW, SOOW                                                                                                                                    | 10,<br>12/125 or<br>250        |
|                                             |                      | 16          | SPT-2, SPT-3, NISPT-2, SVT, SJT, SJTW, SJTO, SJTOW, ST, STW, STOW (All TPE material), SPT-2, NISPT-2, SPT-3, SVT, SJT, SJTW, SJTO, SJTOW, ST, STW, STOW, SO, SOW, SOOW                                                                                                    | 13/125 or<br>250               |
| YC-12, YC-12L, YC-12L-1, YC-12L-2, YC-12L-3 | IEC<br>C13           | 18          | SVT, SJT, SJTW, SJTO, SJTOW, ST, STW, STOW (Shielded and Non-shielded for all types), SPT-2, SPT-3 (All TPE material), SVT, SJT, SJTW, SJTO, SJTOW, SJ, SJO, SJO, SJOW, SJOOW, ST, STW, STOW, SO, SOO, SOW, SOOW (Shielded or Non-Shielded for above types), SPT-2, SPT-3 | 2.5, 7 or<br>10/125 or<br>250  |
|                                             |                      | 17          | SVT, SJT, SJTW, SJTO, SJTOW, ST, STW, STOW (Shielded and Non-shielded for all types), SPT-3 (All TPE material), SVT, SJT, SJTW, SJTO, SJTOW, ST, STW, STOW, SJ, SJO, SJO, SJOW, SJOOW, SO, SOO, SOW, SOOW (Shielded or Non-shielded for above types), SPT-3               | 10,<br>12/125 or<br>250        |

|                                      |         |    |                                                                                                                                                                                                                                                          |                         |
|--------------------------------------|---------|----|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|
|                                      |         | 16 | SJT, SJTW, SJTO, SJTOW, ST, STW, STOW (Shielded and Non-shielded for all types), SPT-3 (All TPE material), SJT, SJTW, SJTO, SJTOW, ST, STW, STOW, SJ, SJO, SJO, SJOW, SJOOW, SO, SOO, SOW, SOOW (Shielded or Non-shielded for above types), SPT-2, SPT-3 | 13/125 or 250           |
|                                      |         | 15 | SJT, SJTW, SJTO, SJTOW, ST, STW, STOW (Shielded and Non-shielded for all types), SPT-3 (All TPE material), SJT, SJTW, SJTO, SJTOW, ST, STW, STOW, SJ, SJO, SJO, SJOW, SJOOW, SO, SOO, SOW, SOOW (Shielded or Non-shielded for above types), SPT-3        | 10, 14/125 or 250       |
|                                      |         | 14 | SJT, SJTW, SJTO, SJTOW, ST, STW, STOW (Shielded and Non-shielded for all types), SPT-3 (All TPE material), SJT, SJTW, SJTO, SJTOW, ST, STW, STOW, SJ, SJO, SJO, SJOW, SJOOW, SO, SOO, SOW, SOOW (Shielded or Non-shielded for above types), SPT-3        | 15/125 or 250           |
|                                      |         | 12 | SJT, SJTW, SJTO, SJTOW, ST, STW, STOW (All TPE material, Shielded and Non-shielded for all types), SJT, SJTW, SJTO, SJTOW, ST, STW, STOW, SJ, SJO, SJO, SJOW, SJOOW, SO, SOO, SOW, SOOW (Shielded or Non-shielded for all types)                         | 15/125 or 250           |
| YC-12(A.C.1)                         | IEC C13 | 12 | SJT, SJTW, SJTO, SJTOW, ST, STW, STOW, SPT-3 (All TPE material), SJT, SJTW, SJTO, SJTOW, ST, STW, STOW, SO, SOW, SOOW, SPT-3                                                                                                                             | 15/125 or 250           |
|                                      |         | 10 | SJT, SJTW, SJTO, SJTOW, ST, STW, STOW (All TPE material), SJT, SJTW, SJTO, SJTOW, ST, STW, STOW, SO, SOW, SOOW                                                                                                                                           | 15/125 or 250           |
| YC-12C                               | IEC C13 | 18 | NISPT-2 (TPE), NISPT-2                                                                                                                                                                                                                                   | 2.5, 7 or 10/125 or 250 |
|                                      |         | 16 | NISPT-2 (TPE), NISPT-2                                                                                                                                                                                                                                   | 13/125 or 250           |
| YC-13                                | IEC C7  | 18 | SPT-1, SPT-2, NISPT-2, SVT, SJT (All TPE material), SPT-1, SPT-1W, SPT-2, SPT-2W, NISPT-1, NISPT-2, SVT, SJT                                                                                                                                             | 2.5/250 or 7/125        |
| YC-13W                               | IEC C7P | 18 | SPT-1, SPT-2, NISPT-2, SVT, SJT (All TPE material), SPT-1, SPT-1W, SPT-2, SPT-2W, NISPT-1, NISPT-2, SVT, SJT                                                                                                                                             | 2.5/250 or 7/125        |
| YC-14                                | IEC C5  | 18 | SPT-2, SVT, SVT shielded, SVTO, SJT, SJT shielded, SJTW, SJTW shielded, SJTO, SJTOW (All TPE material), SVT, SVT Shielded, SVTO, SJT, SJT Shielded, SJTW, SJTW Shielded, SJTO, SJTOW, SV, SVO, SJ, SJO, SJOW, SJOOW                                      | 2.5/250 or 7/125        |
|                                      |         |    | SPT-2                                                                                                                                                                                                                                                    |                         |
| YC-13L                               | IEC C7  | 18 | SPT-1, SPT-2, NISPT-2, SVT, SJT (All TPE material), SPT-1, SPT-1W, SPT-2, SPT-2W, NISPT-1, NISPT-2, SVT, SJT                                                                                                                                             | 2.5/250 or 7/125        |
| YC-13D                               | IEC C7  | 18 | SPT-1, SPT-2, NISPT-2, SVT, SJT (All TPE material), SPT-1, SPT-1W, SPT-2, SPT-2W, NISPT-1, NISPT-2, SJT, SVT                                                                                                                                             | 2.5/250 or 7/125        |
| YC-13C                               | IEC C7  | 18 | NISPT-2 (All TPE material), NISPT-1, NISPT-2                                                                                                                                                                                                             | 2.5/250 or 7/125        |
| YC-13E                               | IEC C7  | 18 | SPT-1, SPT-2, NISPT-2, SVT, SJT (All TPE material), SPT-1, SPT-1W, SPT-2, SPT-2W, NISPT-1, NISPT-2, SVT, SJT                                                                                                                                             | 2.5/250 or 7/125        |
| YC-14L, YC-14L-1, YC-14L-2, YC-14L-3 | IEC C5  | 18 | SVT, SJT, SPT-2 (All TPE material), SVT, SJT, SPT-2                                                                                                                                                                                                      | 2.5/250 or 7/125        |

# Flexible Cord Certified for Canada

**COMPANY****E241374****Yung Li Co Ltd**

7F-12 No 99 Sec 1 Xintai 5th Rd

Xizhi District

New Taipei, 221416 Taiwan

Type(s): *DRT, NISPE-1, NISPE-2, NISPT-1, NISPT-2, S, SE, SJ, SJE, SJO, SJOO, SJOOW, SJOW, SJT, SJT-B, SJTO, SJTOO, SJTOOW, SJTOW, SJTW, SO, SOO, SOOW, SOW, SPE-1, SPE-2, SPE-3, SPT-1, SPT-2, SPT-3, ST, ST-B, STO, STOO, STOOOW, STOW, STW, SVE, SVT, SVT-B, SVTO*

[Last Updated](#) on 2026-05-20

UL Solutions permits the reproduction of the material contained in Product iQ subject to the following conditions: 1. The Guide Information, Assemblies, Constructions, Designs, Systems, and/or Certifications (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from Product iQ with permission from UL Solutions" must appear adjacent to the extracted material. In addition, the reprinted material must include a copyright notice in the following format: "©2026 UL LLC."